WYSE

Wyse Outlet Store

Spring 2010

Toll Free 1.800.469.6484
Local 1.630.375.9275
Fax 1.630.375.9344
WyseStore.com

Virtualize Your Desktop
Visualize the Perfomance

CINTRONICS Online.com

Wyse Recertified Thin Clients

What happens when a Wyse Thin Client is returned unused?

Our Wyse Manufacturer Recertified Thin Clients are in "like new" condition. There are no major cosmetic defects and have no signs of wear & tear. In most cases, these thin clients have never even been used!

The Wyse Outlet Store thoroughly examines the thin client, performs any needed maintenance, then *recertifies* it as operating up to Wyse's new product specifications. Only then do we offer it for sale —at big savings to you!

All Wyse Outlet Store product purchases come with a one-year limited warranty from ship date provided only by the Wyse Outlet Store Service Center. We offer Wyse extended warranties. Additional warranty options may be available. For additional warranty information, call 1-800-469-6484.

- All current Field Engineering Bulletin (FEB) upgrades are done
- Components are new and comply with original specifications
- Plastics are like new—no major cosmetic defects
- Product passes Wyse Technology's Quality Assurance inspection
- Product is in original Wyse packaging
- Includes power cord and set up manual

Wyse Thin Clients

Enterprises spend billions of dollars to ensure that their computer systems are secure, reliable, and agile. Wyse elegantly, easily, and affordably eliminates these problems - and as a result, we save our customers enormous amounts of time and money.

The Wyse line of thin and now zero clients have led the industry for eleven years running. When integrated with additional hardware, software, and services they become part of a complete solution to a business problem.

Wyse thin clients run Windows, Java, Linux, UNIX and web-based applications safely on Microsoft Windows Terminal Services, Citrix application Delivery, and VMware Virtual Desktop Infrastructure servers using thin display protocols. Applications do not traverse the network and are not downloaded into the thin client, eliminating user security and bandwidth issues common with PCs.

Get the right tool for the right task. Consider WSM/Zero Client or the local operating system best for you (page WY-2), then the best platform for you (page WY-9 & 10).

Also see our detailed OS comparison chart at WyseStore.com/pdfs/Wyse_ComparisonChart.pdf.

Virtual Desktops

With our Virtual Desktop solution, your local workstation or laptop connects to your Virtual Desktop and associated applications running in our secure datacenter. A low-power Wyse thin client connects your local hardware to the Internet and thereby to your Virtual Desktop.

Visit InvisibleAdmin.com or call 1-800-469-6484 for details.

WSM vs. Local Operating Systems

Wyse WSM automatically delivers your centralized OS and applications to diskless, fanless, maintenance-free 'Zero Clients' in real time over standard LANs and WANs, resulting in full PC functionality with all the benefits of centralized management.

WSM delivers a variety of OSs, including Windows 2000, XPe, XP Pro, or Vista, delivers applications to users based on their roles, and allows PC-only products from Citrix and others to be used on a zero client or thin client without modification.

Time consuming PC management tasks such as OS upgrades, service packs or new application installations are carried out one-time only, centrally on the server, avoiding the need to visit individual desktops. *See WyseStore.com for more details!*

Local Operating Systems:

Microsoft Windows Embedded Standard (WES) -or- Windows XPe

Windows Embedded OS on Wyse thin clients allows deployment of fully functional desktops with better manageability and significantly lower total cost of ownership than personal computers.

WES and XPe-based thin clients can run 32 bit Windows applications locally or from servers, and support a host of peripherals.

WES and XPe protect the file system image from accidental changes or user customization. On rebooting, the thin client simply returns to it's original state, thus preventing damage from users or malware.

Please note: Wyse is one of only two vendors enjoying a direct relationship with Microsoft, thus avoiding the additional markups of third-party distributors—expenses other manufacturers pass along to customers. *See WyseStore.com for more details!*

Wyse Linux is a powerful OS optimized for thin computing, ideal for organizations running server-based Windows applications, local Linux applications or distributed X Window applications.

Wyse Linux's read-only file system offers the highest protection from viruses and software corruption. *See WyseStore.com for more details!*

Microsoft Windows CE is ideal for departments and organizations that need support for Citrix ICA, Microsoft RDP and VM view as well as a local browser and terminal emulation, plus standard connections to peripherals and add-ons.

Microsoft Windows CE gives you a PC-like experience on the desktop, with local terminal emulation so you can run most legacy applications. This small, fast operating system combined with firmware components reduces boot times and increases protection against viruses, trojan horses, and other malware. *See WyseStore.com for more details!*

Wyse Thin OS is the most optimized, management-free solution for Citrix XenApp, Citrix XenDesktop, Microsoft Terminal Server and VMware View virtual desktops.

Wyse Thin OS ensures every Wyse thin client provides flexible and secure user access as it's the only thin computing operating system to feature an unpublished API delivering built-in in protection from the viruses, malicious software and trojans developed by hackers. *See WyseStore.com for more details!*

Downloadable datasheets available at WyseStore.com.

Thin Client Matrix

Thin Clients						
	Zero Client (WSM)	Windows Embedded Standard (WES)	Wyse XPe	Windows Linux	Windows CE	Wyse Thin OS
R Class	R00LE R00L	R90LEW R90LW	R90LE R90L	R50LE R50L		
V Class			V90LE V90L V90	V50 LE V50L V50	V30LE V30L V30	V10L
C Class			C90LE		C30LE	
S Class			S90	S50	S30	S10
Mobile Thin Clients						
XL Class 15.4”			X90Le X90L			
X Class 12.1”			X90e X90			

Call 1.800.469.6484 to inquire about thin clients.

Zero Client/Windows Embedded

R00LE
WSM / ZERO CLIENT EXPANDABLE

- 1.5GHz AMD Sempron
- 802.11 b/g/n & Bluetooth 2.0 (optional)
- 1 DVI-I, 1 DVI-D Port
- 2 PS/2, 2 ser., 1 par. port
- USB 2.0: 2 front, 4 back, 4 internal
- PCIe 2.0 x4 w/ x16 slot, or 2.5" HDD (optional)
- 10/100/1000 Base-T Gigabit Ethernet
- VESA monitor support, DDC, Dual monitor support
- Aud out: 1/8" mini16-bit stereo, int mono spkr
- Aud in: 1/8" mini, 8-bit mic
- AMD ATI 690E graphics
- Optical mouse, keybd
- 100-240VAC, 50/60Hz, 19VDC, 65W, 14.1W avg
- 1 year limited warranty

See models at WyseStore.com

R00L
WSM / ZERO CLIENT

- 1GHz AMD Sempron
- 802.11 b/g/n & Bluetooth 2.0 (optional)
- 1 DVI-I, 1 DVI-D Port
- 2 PS/2, 2 serial ports
- USB 2.0: 2 front, 4 back
- 10/100/1000 Base-T Gigabit Ethernet
- VESA monitor support, Display Data Control, Dual monitor support
- Aud out: 1/8" mini16-bit stereo, int mono spkr
- Aud in: 1/8" mini, 8-bit mic
- AMD ATI 690E graphics
- Optical mouse, keybd
- 100-240VAC, 50/60Hz, 19VDC, 65W, 12.7W avg
- 1 year limited warranty

909529-01L, 1GR, US
909529-21L, 2GR, US
909529-41L, 2GF/1GR, US

V00LE
WSM / ZERO CLIENT

- Via C7 Eden 1.2GHz
- 1 DVI-I port, VGA adapter
- Dual-video Support
- 1 serial, 1 parallel port
- USB 2.0 (1 front, 2 back)
- Optical mouse, keybd
- 10/100 Base-T Fast Eth.
- VESA monitor support, Display Data Control, up to 1920x1080 at 32 bpp color
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60 Hz, 13.2W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- Options: Int. Wireless, USB 802.11b/g ext adptr, Int. Smart Card reader, CardBus/PCMCIA slot
- 1 year limited warranty

902131-01LR, 0F/512R US

V00L
WSM / ZERO CLIENT

- Via C7 Eden 800MHz
- 1 DVI-I port, VGA adapter
- Dual-video Support
- 1 serial, 1 parallel port
- USB 2.0 (1 front, 2 back)
- Optical mouse, keybd
- 10/100 Base-T Fast Eth.
- VESA monitor support, Display Data Control, up to 1920x1080 at 32 bpp color
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60 Hz, 14.1W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- Options: Int. Wireless, USB 802.11b/g ext adptr, Int. Smart Card reader, CardBus/PCMCIA slot
- 1 year limited warranty

902131-01LR, 0F/512R US

C00LE
WSM / ZERO CLIENT

- VIA 1GHz
- Internal 802.11 b/g/n (optional)
- VIA VX855 chipset
- 1 DVI-I port, VGA adapter
- Dual video support
- USB 2.0: 2 front, 2 back
- 2 PS/2 ports
- Optical mouse, keybd
- 10/100/1000 Base-T Gigabit Ethernet
- VESA monitor support, Display Data Control
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8-bit mic
- 100-240VAC, 50/60Hz, 7W (1 monitor), Energy Star V.5.0 compliant
- 1 year limited warranty

902176-01L, 1GR, DVI, US

Keyboards
US & INTERNATIONAL

901715-34R, USB/PS2 US-Intl
901715-36LR,USB/PS2 Fr-Ca
901716-06LR, USB/PS2 US
901716-08R, USB/PS2 US
901861-26R, Winterm US

Mouse
3 BUTTON OPTICAL

920276-01LR, PS2 Black

Power Adapters
AC/DC, 12V, 5V

770340-05LR, 5V/4A 10V/M
770375-01R, 12V/2.5A 30W
770375-01LR, 12V/2.5A 30W

R90LEW
WIN EMBED STND (WES) EXPANDABLE

- 1.5GHz AMD Sempron
- 802.11 b/g/n & Bluetooth 2.0 (optional)
- 1 DVI-I, 1 DVI-D Port
- 2 PS/2, 2 ser., 1 par. port
- USB 2.0: 2 front, 4 back, 4 internal
- PCIe 2.0 x4 w/ x16 slot, or 2.5" HDD (optional)
- 10/100/1000 Base-T Gigabit Ethernet
- VESA monitor support, DDC, Dual monitor support
- Aud out: 1/8" mini16-bit stereo, int mono spkr
- Aud in: 1/8" mini, 8-bit mic
- AMD ATI 690E graphics
- Optical mouse, keybd
- 100-240VAC, 50/60Hz, 19VDC, 65W, 14.1W avg
- 1 year limited warranty

909542-01L, 2GF/1GR, US

R90LW
WIN EMBED STND (WES)

- 1GHz AMD Sempron
- 802.11 b/g/n & Bluetooth 2.0 (optional)
- 1 DVI-I, 1 DVI-D Port
- 2 PS/2, 2 serial ports
- USB 2.0: 2 front, 4 back
- 10/100/1000 Base-T
- VESA monitor support, Display Data Control, Dual monitor support
- Aud out: 1/8" mini16-bit stereo, int mono spkr
- Aud in: 1/8" mini, 8-bit mic
- AMD ATI 690E graphics
- Optical mouse, keybd
- 100-240VAC, 50/60Hz, 19VDC, 65W, 12.7W avg
- 1 year limited warranty

909541-01L, 2GF/1GR, US
909541-21L, 4GF/2GR, US
909541-51L, 2GF/1GR, Int. Wireless+Bluetooth, US

Downloadable datasheets available at WyseStore.com.

WYSE RECERTIFIED THIN CLIENTS

Windows XPe

R90LE
WIN XPE EXPANDABLE

- 1.5GHz AMD Sempron
- 802.11 b/g/n & Bluetooth 2.0 (option)
- 1 DVI-I, 1 DVI-D Port
- 2 PS/2, 2 ser., 1 par. port
- USB 2.0: 2 front, 4 back, 4 internal
- PCIe 2.0 x4 w/ x16 slot, or 2.5" HDD (optional)
- 10/100/1000 Base-T Gigabit Ethernet
- VESA monitor support, DDC, Dual monitor support
- Aud out: 1/8" mini16-bit stereo, int mono spkr
- Aud in: 1/8" mini, 8-bit mic
- AMD ATI 690E graphics
- Optical mouse, keybd
- 100-240VAC, 50/60Hz, 19VDC, 65W, 14.1W avg
- 1 year limited warranty

909525-01L 1GF/1GR, US
909535-21L 4GF/2GR, US

R90L
WIN XPE

- 1GHz AMD Sempron
- 802.11 b/g/n & Bluetooth 2.0 (optional)
- 1 DVI-I, 1 DVI-D Port
- 2 PS/2, 2 serial ports
- USB 2.0: 2 front, 4 back
- 10/100/1000 Base-T Eth
- VESA monitor support, Display Data Control, Dual monitor support
- Aud out: 1/8" mini16-bit stereo, int mono spkr
- Aud in: 1/8" mini, 8-bit mic
- AMD ATI 690E graphics
- Optical mouse, keybd
- 100-240VAC, 50/60Hz, 19VDC, 65W, 12.7W avg
- 1 year limited warranty

909527-01L 1GF/1GR, US
909527-07L 1GF/1GR, FRCN
909527-21L 2GF/1GR, US
909527-51L 1GF/1GR, IWBT, US
909537-21L 4GF/2GR, US

Now at the App Store! Wyse PocketCloud™

Need complete access to your PC or virtual machine from the palm of your hand? With Wyse PocketCloud™ it's no problem! From the leader in thin-computing, Wyse PocketCloud allows you to view and manage your PC and your virtual Windows desktop anytime and anywhere on your iPhone or iPod touch.

For IT administrators that manage large numbers of computers, Wyse PocketCloud allows quick and easy access to an end-user machine from anywhere on the road. For remote users needing secure access to their computer, Wyse PocketCloud is a simple and effective way of "taking" their computer with them in the palm of their hand.

V90LE
WIN XPE HIGH RANGE DUAL VIDEO

- Via C7 Eden 1.2GHz
- 1 DVI-I port, VGA adptr
- Dual-video Support
- 1 serial, 1 parallel port
- USB 2.0 (1 front, 2 back)
- Optical mouse, keybd
- 10/100 Base-T Fast Eth.
- VESA monitor support, Display Data Control, up to 1920x1080 at 32 bpp color
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60 Hz, 13.2W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- Options: Int. Wireless, USB 802.11b/g ext adptr, Int. Smart Card reader, CardBus/PCMCIA slot
- 1 year limited warranty

See models at WyseStore.com

V90L
WIN XPE MID RANGE DUAL VIDEO

- Via C7 Eden 800MHz
- 1 DVI-I port, VGA adptr
- Dual-video Support
- 1 serial, 1 parallel port
- USB 2.0 (1 front, 2 back)
- Optical mouse, keybd
- 10/100 Base-T Fast Eth.
- VESA monitor support, Display Data Control, up to 1920x1080 at 32 bpp color
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60 Hz, 14.1W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- Options: Int. Wireless, USB 802.11b/g ext adptr, Int. Smart Card reader, CardBus/PCMCIA slot
- 1 year limited warranty

See models at WyseStore.com

V90
VERSATILE WIN XPE

- True 1GHz x86 CPU, high resolution 24-bit video controller
- PC/SC smart card reader support
- 32-bit CardBus/PC-Card expansion slot
- 2 serial, 1 parallel, 2 PS/2, 3 USB 2.0, audio in, headphone/speaker
- Embedded custom local applications
- Supports RDP 5.2, ICA® 8.0 protocols and terminal emulation
- Diskless, fanless
- Wyse™ Rapport® (Workgroup ed.) client management software
- 1 year limited warranty

See models at WyseStore.com or inquire at 1-800-469-6484

C90LE
WIN XPE

- VIA 1GHz
- Internal 802.11 b/g/n (optional)
- VIA VX855 chipset
- 1 DVI-I port, VGA adapter
- Dual video support
- USB 2.0: 2 front, 2 back
- 2 PS/2 ports
- Optical mouse, keybd
- 10/100/1000 Base-T Gigabit Ethernet
- VESA monitor support, Display Data Control
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8-bit mic
- 100-240VAC, 50/60Hz, 7W (1 monitor)
- 1 year limited warranty

902166-01L 1GF/1GR, DVI, Internal Wireless, US
902167-01L 1GF/1GR, DVI, US
902167-21L 2GF/1GR, DVI, US

Call 1.800.469.6484 to inquire about other thin client models not shown here.

Windows XPe

S90
STREAMLINE, WIN XPE

- Optimized for MS Terminal Server, Citrix XenApp, Citrix Xen Desktop, & VMware View
- AMD Geode GX 366MHz
- USB keybd, PS/2 mouse
- One serial port
- USB 2.0 (2 front, 2 back)
- 10/100 Base-T Fast Eth
- VGA-type video output
- VESA monitor support
- Display Data Control
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60Hz, 6.6W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- 1 year limited warranty

See models at WyseStore.com or inquire at 1-800-469-6484

X90Le
15.4" MOBILE SMART CARD WIN XPE

- Bluetooth 2.0 support
- Smartcard and Citrix Password Manager
- 802.11b/g Wireless LAN, 802.1x WPA, WPA2 extensible secur
- Supports RDP 6.x, ICA® 10.x and terminal emulation
- 15.4" WXGA TFT LCD
- Diskless, fanless
- 10/100/1000Base-T Fast Ethernet
- Data security/integrity
- 3G capable (with broad band access card)
- VGA and DVI outputs
- Wyse Device Manager (Workgroup ed.) client management software
- 1 year limited warranty

See models at WyseStore.com

X90L
15.4" MOBILE WIN XPE

- 802.11b/g Wireless LAN, 802.1x WPA, WPA2 extensible security
- Supports RDP 6.x, ICA® 10.x and terminal emulation
- 15.4" WXGA TFT LCD
- Diskless, fanless
- 10/100/1000Base-T Fast Ethernet
- Data security/integrity
- 3G capable (with broad band access card)
- VGA and DVI outputs
- Wyse Device Manager (Workgroup ed.) client management software
- 1 year limited warranty

See models at WyseStore.com or inquire at 1-800-469-6484

X90e
12.1" MOBILE SMART CARD WIN XPE

- Smartcard and Citrix Password Manager integrated
- Bluetooth 2.0 support
- 802.11b/g Wireless LAN with 802.1x WPA and WPA2 extensible security protection
- Supports RDP 6.x, ICA® 10.x
- 12.1" WXGA TFT LCD
- Diskless, fanless, convection cooled
- 10/100Base-T Ethernet
- Data security/integrity
- External VGA output
- Wyse Device Manager (Workgroup ed.) client management software
- 1 year limited warranty

909520-01L, 512F/512R, SC/Bluetooth, US

X90
12.1" MOBILE WIN XPE

- 802.11b/g Wireless LAN with 802.1x WPA and WPA2 extensible security protection
- Supports RDP 6.x, ICA® 10.x
- 12.1" WXGA TFT LCD
- Diskless, fanless, convection cooled
- 10/100Base-T Ethernet
- Data security/integrity
- External VGA output
- Wyse Device Manager (Workgroup ed.) client management software
- 1 year limited warranty

909520-31L, 512F/512R US

Downloadable datasheets available at WyseStore.com.

Wyse Linux

R50LE
LINUX EXPANDABLE

- 1.5GHz AMD Sempron
- 802.11 b/g/n & Bluetooth 2.0 (option)
- 1 DVI-I, 1 DVI-D Port
- 2 PS/2, 2 ser., 1 par. port
- USB 2.0: 2 front, 4 back, 4 internal
- PCIe 2.0 x4 w/ x16 slot, or 2.5" HDD (optional)
- 10/100/1000 Base-T Gigabit Ethernet
- VESA monitor support, DDC, Dual monitor support
- Aud out: 1/8" mini16-bit stereo, int mono spkr
- Aud in: 1/8" mini, 8-bit mic
- AMD ATI 690E graphics
- Optical mouse, keybd
- 100-240VAC, 50/60Hz, 19VDC, 65W, 14.1W avg
- 1 year limited warranty

909524-21L 1GF/1GR, US

R50L
LINUX

- 1GHz AMD Sempron
- 802.11 b/g/n & Bluetooth 2.0 (optional)
- 1 DVI-I, 1 DVI-D Port
- 2 PS/2, 2 serial ports
- USB 2.0: 2 front, 4 back
- 10/100/1000 Base-T Gigabit Ethernet
- VESA monitor support, Display Data Control, Dual monitor support
- Aud out: 1/8" mini16-bit stereo, int mono spkr
- Aud in: 1/8" mini, 8-bit mic
- AMD ATI 690E graphics
- Optical mouse, keybd
- 100-240VAC, 50/60Hz, 19VDC, 65W, 12.7W avg
- 1 year limited warranty

909526-21L, 1GF/1GR, US
909526-71L, 1GF/1GR, Int. Wireless+Bluetooth, US

Wyse Device Manager

Centralized Thin Client Management that's Scalable and Flexible

V50LE
LINUX HIGH RANGE DUAL VIDEO

- Via C7 Eden 1.2GHz
- 1 DVI-I port, VGA adptr
- Dual-video Support
- 1 serial, 1 parallel port
- USB 2.0 (1 front, 2 back)
- Optical mouse, keybd
- 10/100 Base-T Fast Eth.
- VESA monitor support, Display Data Control, up to 1920x1080 at 32 bpp color
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60 Hz, 13.2W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- Options: Int. Wireless, USB 802.11b/g ext adptr, Int. Smart Card reader, CardBus/PCMCIA slot
- 1 year limited warranty

See models at WyseStore.com

V50L
LINUX MID RANGE DUAL VIDEO

- Via C7 Eden 800MHz
- 1 DVI-I port, VGA adptr
- Dual-video Support
- 1 serial, 1 parallel port
- USB 2.0 (1 front, 2 back)
- Optical mouse, keybd
- 10/100 Base-T Fast Eth.
- VESA monitor support, Display Data Control, up to 1920x1200 at 24 bpp color
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60 Hz, 14.1W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- Options: Int. Wireless, USB 802.11b/g ext adptr, Int. Smart Card reader, CardBus/PCMCIA slot
- 1 year limited warranty

See models at WyseStore.com

V50
VERSATILE LINUX

- Free seating
- True 1GHz x86 CPU, high resolution 24-bit video controller
- PC/SC smart card reader support
- 32-bit CardBus/PC-Card expansion slot
- 2 serial, 1 parallel, 2 PS/2, 3 USB 2.0, audio in, headphone/speaker
- Wyse Add-On technology
- Stateless plug-and-play
- Native X Windows, text emulations, RDP 5.1, ICA® 8.0 protocols
- Wyse™ Rapport® (Workgroup ed.) client management software
- 1 year limited warranty

902091-06, 128F/256R, US
902091-28, 256F/256R, US

S50
STREAMLINE, LINUX

- Optimized for MS Terminal Server, Citrix XenApp, Citrix Xen Desktop, & VMware View
- AMD Geode GX 366MHz
- USB keybd, PS/2 mouse
- One serial port
- USB 2.0 (2 front, 2 back)
- 10/100 Base-T Fast Eth
- VGA-type video output
- VESA monitor support
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60Hz, 6.6W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- 1 year limited warranty

902090-11, 128F/256R, US
902114-01L, 128F/256R, US
902114-31L, 64F/128R, US

Call 1.800.469.6484 to inquire about other thin client models not shown here.

Windows CE/Wyse Thin OS

V30LE
WIN CE HIGH RANGE DUAL VIDEO

- Via C7 Eden 1.2GHz
- 1 DVI-I port, VGA adptr
- Dual-video Support
- 1 serial, 1 parallel port
- USB 2.0 (1 front, 2 back)
- Optical mouse, keybd
- 10/100 Base-T Fast Eth.
- VESA monitor support, Display Data Control, up to 1920x1440 at 32 bpp color
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60 Hz, 13.2W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- Options: Int. Wireless, USB 802.11b/g ext adptr, Int. Smart Card reader, CardBus/PCMCIA slot
- 1 year limited warranty

902142-01L, 128F/128R, US

V30L
WIN CE MID RANGE DUAL VIDEO

- Via C7 Eden 800MHz
- 1 DVI-I port, VGA adptr
- Dual-video Support
- 1 serial, 1 parallel port
- USB 2.0 (1 front, 2 back)
- Optical mouse, keybd
- 10/100 Base-T Fast Eth.
- VESA monitor support, Display Data Control, up to 1920x1440 at 32 bpp color
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60 Hz, 14.1W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- Options: Int. Wireless, USB 802.11b/g ext adptr, Int. Smart Card reader, CardBus/PCMCIA slot
- 1 year limited warranty

See models at WyseStore.com

V30
VERSATILE WIN CE

- True 1GHz x86 CPU, high resolution 24-bit video controller
- PC/SC smart card reader support
- 32-bit CardBus/PC-Card expansion slot
- 2 serial, 1 parallel, 2 PS/2, 3 USB 2.0, audio in, headphone/speaker
- Supports RDP 5.5 and ICA® 8.0 protocols, 15+ resident terminal emulations
- Diskless, fanless
- Wyse™ Rapport® (Workgroup ed.) client management software
- 1 year limited warranty

902095-51L, 64F/128R, Internal Wireless, US

C30LE
WINDOWS CE

- VIA 1GHz
- Internal 802.11 b/g/n (optional)
- VIA VX855 chipset
- 1 DVI-I port, VGA adapter
- Dual video support
- USB 2.0: 2 front, 2 back
- 2 PS/2 ports
- Optical mouse, keybd
- 10/100/1000 Base-T Gigabit Ethernet
- VESA monitor support, Display Data Control
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8-bit mic
- 100-240VAC, 50/60Hz, 7W (1 monitor), Energy Star V.5.0 compliant
- 1 year limited warranty

Call 1-800-469-6484 for availability.

S30
STREAMLINE, WIN CE

- Optimized for MS Terminal Server, Citrix XenApp, Citrix Xen Desktop, & VMware View
- AMD Geode GX 366MHz
- USB keybd, PS/2 mouse
- One serial port
- USB 2.0 (2 front, 2 back)
- 10/100 Base-T Fast Eth
- VGA-type video output
- VESA monitor support
- Display Data Control
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60Hz, 6.6W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- 1 year limited warranty

See models at WyseStore.com or inquire at 1-800-469-6484

Wyse Named 2007 Citrix Ready Partner of the Year

V10L
THIN OS DUAL VIDEO

- Via C7 Eden 800MHz
- 1 DVI-I port, VGA adptr
- Dual-video Support
- 1 serial, 1 parallel port
- USB 2.0 (1 front, 2 back)
- Optical mouse, keybd
- 10/100 Base-T Fast Eth.
- VESA monitor support, Display Data Control, up to 1920x1200 at 32 bpp color
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60 Hz, 14.1W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- Options: Int. Wireless, USB 802.11b/g ext adptr, Int. Smart Card reader, CardBus/PCMCIA slot
- 1 year limited warranty

See models at WyseStore.com

S10
STREAMLINE, THIN OS

- Optimized for MS Terminal Server, Citrix XenApp, Citrix Xen Desktop, & VMware View
- AMD Geode GX 366MHz
- USB keybd, PS/2 mouse
- One serial port
- USB 2.0 (2 front, 2 back)
- 10/100 Base-T Fast Eth
- VGA-type video output
- VESA monitor support
- Display Data Control
- Aud out: 1/8" mini16-bit stereo, 48kHz sampling
- Aud in: 1/8" mini, 8 bit mic
- 100-240VAC, 50/60Hz, 6.6W avg (1 keybd, 1 PS/2 mouse, 1 monitor)
- 1 year limited warranty

See models at WyseStore.com or inquire at 1-800-469-6484

Downloadable datasheets available at WyseStore.com

Thin Client Classes

RLE Class (12.1”h x 3.2”w x 8.8”d)

1. Parallel Port
2. Serial Port (2)
3. PS/2-type keyboard port
4. DVI-I #1 port (1x DVI-D or 1x VGA)
5. DVI-I #2 port (1x DVI-D)
6. Microphone in
7. USB port (4)
8. +19V Power adapter input
9. Wireless antenna port (optional)*
10. PS/2-type mouse port
11. Lock receptacle
12. PCIe slot
13. Line out/Speaker out
14. Network port, 10/100/1000 Base-T
15. Power on/off button/light
16. Activity light
17. USB port (2)
18. PS/2-type mouse port

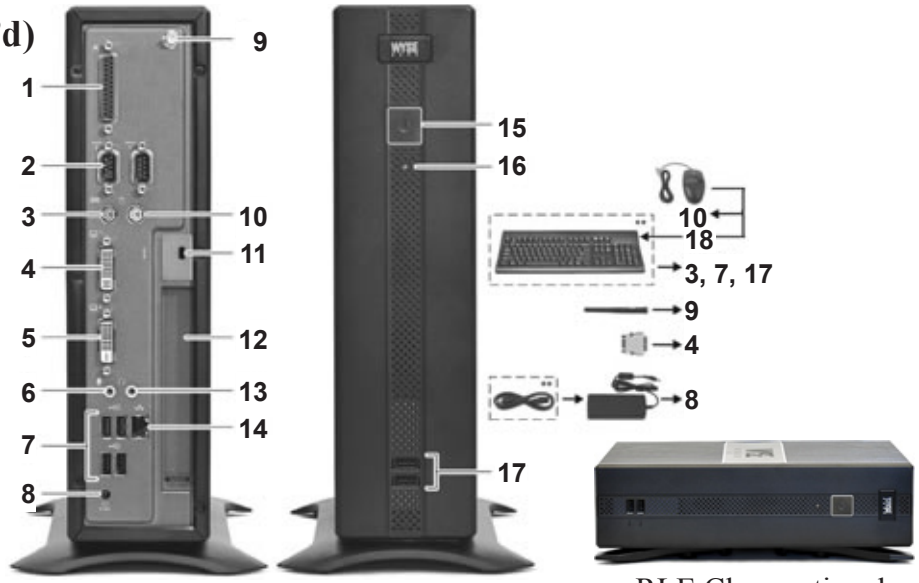

RLE Class optional horizontal mount

*Wireless option not available in all localities.
**Supplied for U.S.A.; in other locales, check package contents or contact your Wyse reseller.

RL Class (9.8”h x 2.1”w x 8.8”d)

1. Serial Port (2)
2. PS/2-type keyboard port
3. DVI-I #1 port (1x DVI-D or 1x VGA)
4. DVI-D #2 port (1x DVI-D)
5. Microphone in
6. USB port (4),
7. +19V Power adapter input
8. Wireless antenna port (optional)*
9. PS/2-type mouse port
10. Line out/Speaker out
11. Network port, 10/100/1000 Base-T
12. Lock receptacle
13. Power on/off button/light
14. Activity light
15. USB port (2)
16. PS/2-type mouse port

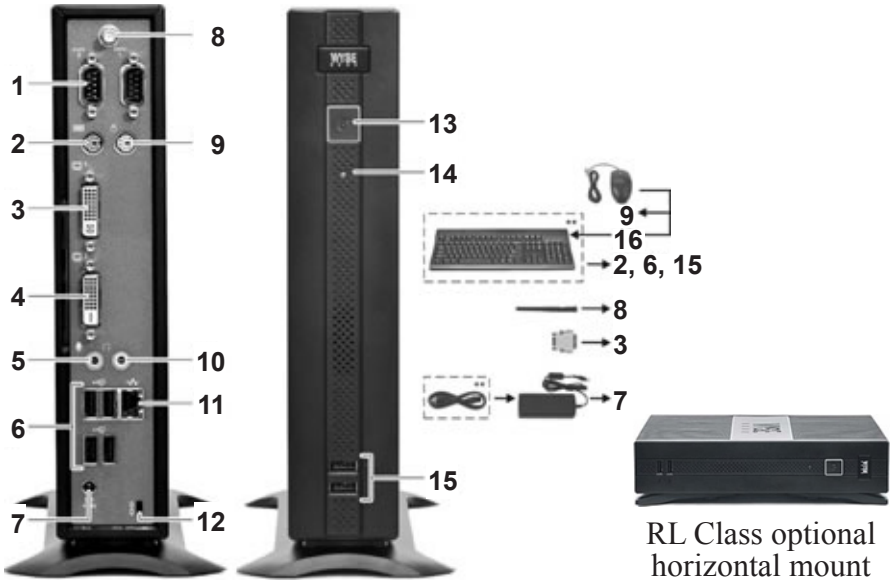

RL Class optional horizontal mount

C Class (1.38”h x 6.94”w x 4.75”d)

1. Microphone in
2. Speaker out[1]
3. USB port (2)[2]
4. Power on/off button/light
5. Lock receptacle
6. Wireless antenna port (optional)[3]
7. +12V Power adapter input
8. Secure clip for DC power cord
9. PS/2-type keyboard port
10. PS/2-type mouse port
11. DVI-I port (1x DVI-D or 1x VGA)
12. Network port, 10/100/1000 Base-T
13. USB port (2) [2]

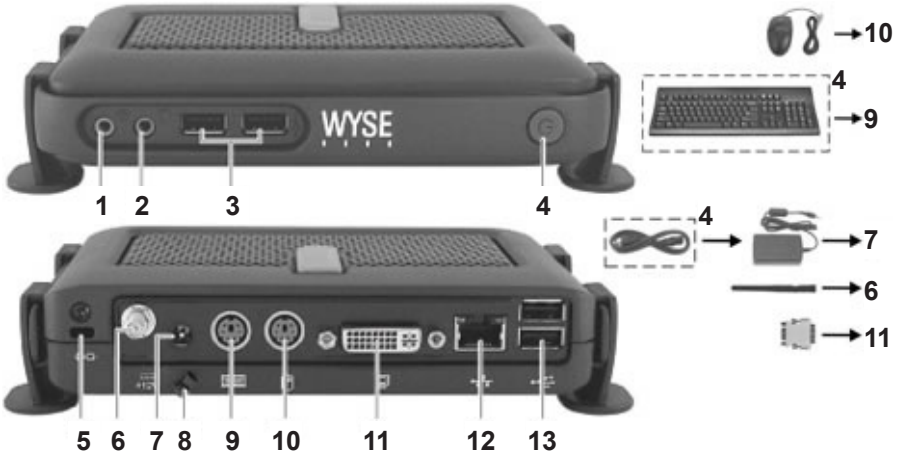

1.800.469.6484 • WyseStore.com

Thin Client Classes

V Class (7.9”h x 1.8”w x 7.1”d)

1. +12V Power adapter input
2. PS/2-type keyboard port
3. USB port (2)
4. DVI-I port (1x DVI-D or 1x VGA)
5. Parallel Port
6. Wireless antenna port (optional)
7. Secure clip for DC power cord
8. PS/2-type mouse port
9. Network port, 10/100 Base-T
10. Serial port
11. CardBus/PCMCIA and SD card slots (optional)*; cover not shown
12. Lock receptacle
13. Power on/off button/light
14. LED (amber: standby; green: on)
15. Internal smart card reader (optional)**
16. Microphone in
17. Speaker out
18. USB port
19. PS/2-type mouse port

*Not available on V10L

**Insert smart card with electrical contacts facing outward; red light flashes from side vent when card is being read.

***Supplied for U.S.A.; in other locales, check package contents or contact your Wyse reseller.

****The DVI-I to DVI-D+VGA splitter cable is sold separately.

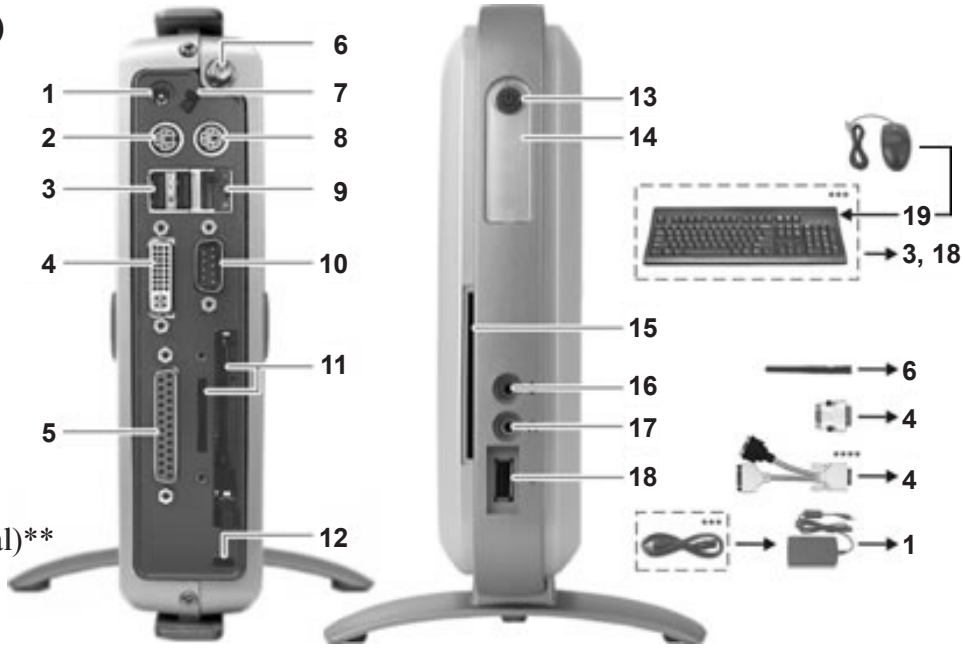

V Class optional horizontal mount

S Class (1.38”h x 6.94”w x 4.75”d)

1. Microphone in
2. Speaker out
3. USB port (2)*
4. Power on/off button/light
5. Lock receptacle
6. +12V Power adapter input
7. Video port
8. Serial port*
9. Network port, 10/100 Base-T
10. USB port (2)*
11. PS/2-type mouse port

* Not all USB or serial devices are supported; check with Wyse or your Wyse representative to find out if a particular device is supported on your S class model thin client.

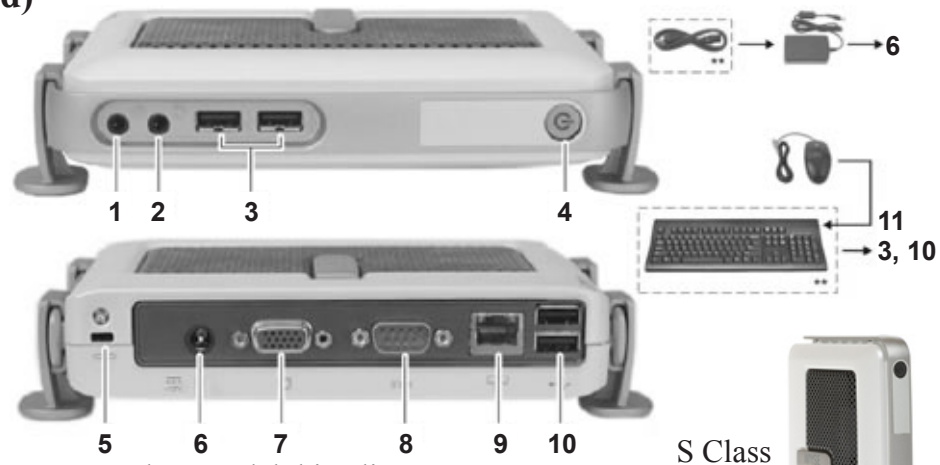

S Class optional vertical mount

C Class notes (facing page):

1 **Warning:** Listening at high volumes for extended durations can damage your hearing.

2 Not all USB or serial devices are supported; check with Wyse or your Wyse representative to find out if a particular device is supported on your C class model thin client.

3 Wireless option not available in all localities.

4 Supplied for U.S.A.; in other locales, check package contents or contact your Wyse reseller.

WyseStore.com

1.800.469.6484 Toll Free
1.630.375.9275 Local
1.630.375.9344 Fax

CINTRONICSonline.com